


## Wheel Recovery and Transport Strap, Std System 2000

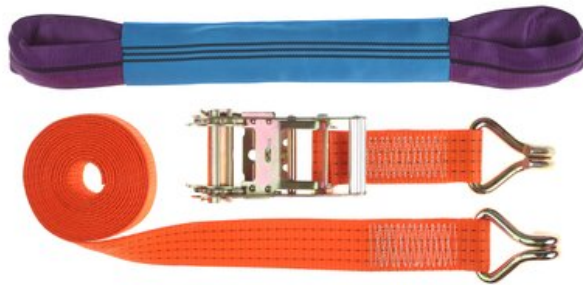

### Product information

VR105 "System 2000" round the wheel recovery and car transporter strap has a 4000kg rated break force (BF). Strap features include: a double locking short narrow handle ratchet for added security, claw hook end fitting, soft link strap with wear sleeve. The strap is designed to tension around the wheel giving multi directional tensioning onto a recovery or transporter vehicle deck.

Available in the industry standard length of 4 metres.

As one of the country's leading load restraint manufacturers the Company is also pleased to offer a bespoke service that can quickly produce lashings with alternative; lengths, end fittings, ratchets or webbing to order. Webbing can also be customer printed with your company logo or other design.

- Soft link strap protects alloy wheels from damage
- Standard locking ratchet
- Claw hooks end fittings
- Alternative end fittings include twisted snap hooks and hook with safety keeper
- 50mm high-tenacity polyester webbing

**Marking:** According to standard

**Standard:** EN 12195-2

| Part Code | LC daN | MBL | Length | Band width mm | Design | Fitting          | Colour | Weight kg | Packing Qty. | Delivery time |
|-----------|--------|-----|--------|---------------|--------|------------------|--------|-----------|--------------|---------------|
| 26C0020   | 2,000  | 4   | 4      | 50            | 2-part | Wire hook double | Orange | 1.55      | 1            | 1             |